

S
E
R
V
I
C
E

A
V
O
I
D
A
N
C
E
+
D
E
P
T
H

e-safe⁺™

electronic Service avoidance for everyone

Simple warning scale for likelihood of ANY service presence

HIGH CAUTION LOW



Including:

Fibre Optic, HDPE, MDPE
Asbestos, Brick, Clay, PVC
Balanced HV, Pot ended
& Direct current cables




NEW FEATURES

ONE touch Depth estimation
4 Level CHRONOS MASKING
Off Road MAX Option



PipeHawk plc
UNDERGROUND INTELLIGENCE

Dimensions

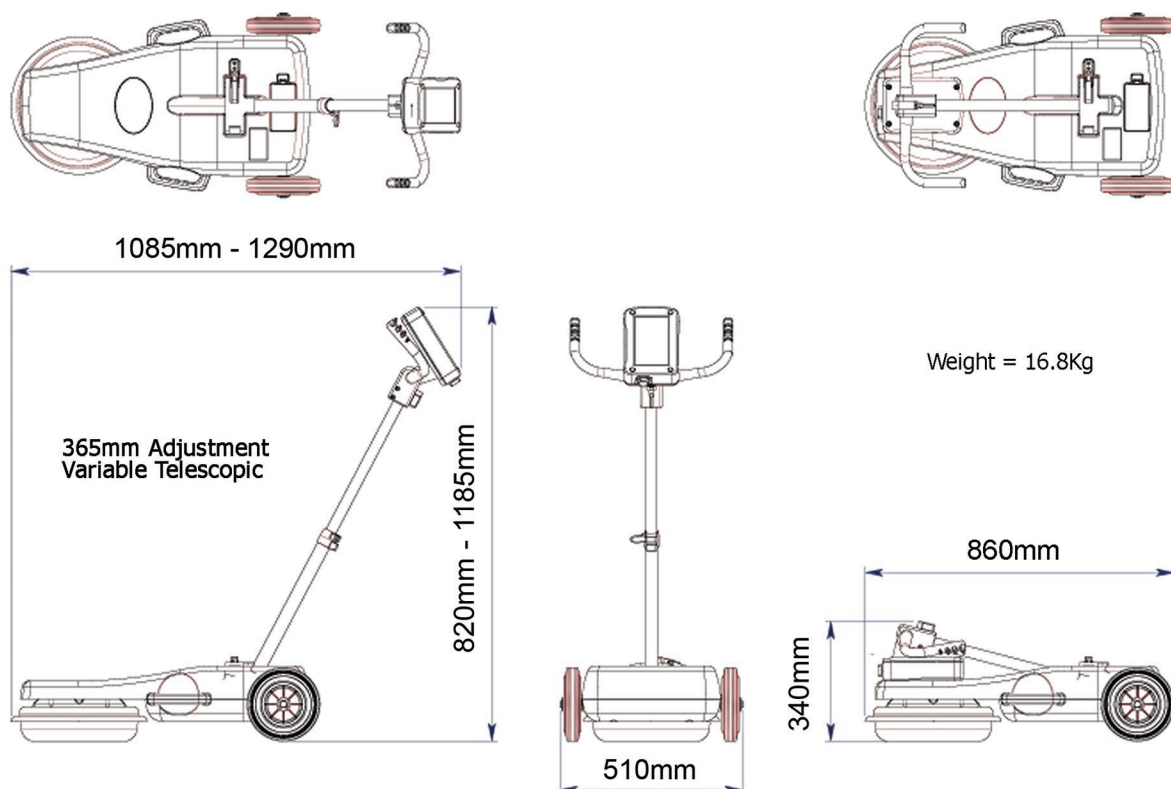

Main Features

Antenna Type & Frequency Range	Ground contact X-Polar 135MHz - 835MHz
Sensitivity (threshold) adjustment	16 operator adjustable increments (default 8)
Chronos Masking - 4 Levels + All (% attained depth)	Shallowest 16%; 32%, Deepest 68%; 84%
Detection Range (Average conditions)	50mm - 1500mm subject to soil/environmental change
Depth Estimation (with Safety Protocol)	Nearest 0.1 metres +/- 0.1 metres
Depth Estimation (with Safety Protocol overridden)	Nearest 0.1 metres +/- 0.3 - 0.5 metres
Display Screen	High Contrast 177mm Portrait Sunlight readable LCD
Display Angle Adjustment	90 Degrees Operator adjustable tilt
Battery Type	Removable 16.4v Lithium-ion Rechargeable Pod
Battery Life	3-5 hrs Full charge (temperature dependent)
Battery Charging	External (110v-220v AC) charger 2-6 hrs
Ambient Operating Temperature Range	Minus 10 Degrees Celsius to Plus 50 Degrees Celsius

Head Office

Your Local Contact

PipeHawk plc

**4 Manor Park Ind' Estate
Wyndham St. Aldershot
Hampshire GU12 4NZ
United Kingdom**

**Tel. +44 (0)1252 338959
Email. info@pipehawk.com
Web. www.pipehawk.com**